

Datasheet

[Get a Quote](#)

Overview

S5720-28X-SI-24S-DC - Huawei S5700 Series Switches.S5720-28X-SI-24S-DC(24 Gig SFP,8 of which are dual-purpose 10/100/1000 or SFP,4 10 Gig SFP+,DC - 48V,front access)


Quick Specification

Model	S5720-28X-SI-24S-DC
Part Number	98010626
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	4.1 kg (9.04 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)

Datasheet

Product Details:

Appearance:

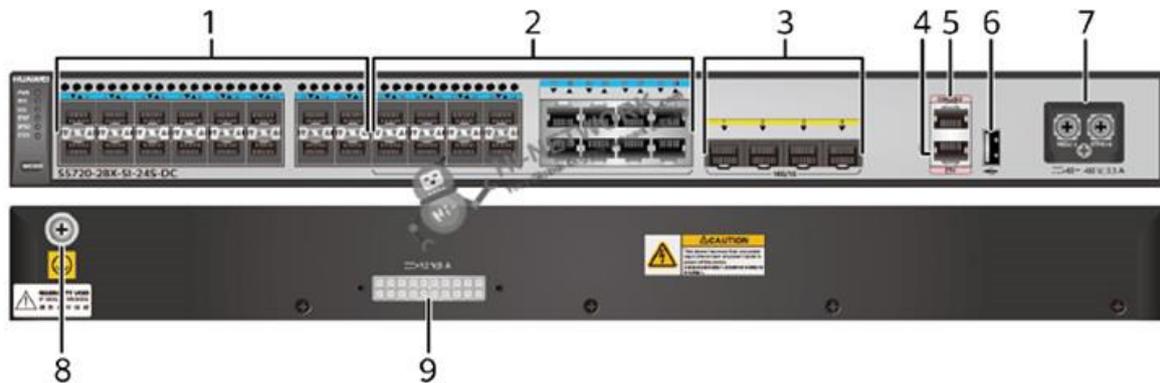

①	Sixteen 100/1000BASE-X ports
②	Eight combo ports (10/100/1000BASE-T + 100/1000BASE-X)
③	Four 10GE SFP+ ports
④	One ETH management port
⑤	One console port
⑥	One USB port
⑦	DC power terminal
⑧	Ground screw
⑨	RPS socket

Get more information:

Do you have any question about the S5720-28X-SI-24S-DC 98010626?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010626
Model	S5720-28X-SI-24S-DC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	41 years

Datasheet

Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: ± 6 kV
Power supply surge protection	± 1 kV in differential mode, ± 2 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)
Weight (with packaging)	4.1 kg (9.04 lb)
Stack ports	GE SFP optical ports and 10GE SFP+ optical ports except combo ports on the front panel
RTC	Supported
RPS	Supported
PoE	Not supported
Rated voltage range	-48 V DC to -60 V DC
Maximum voltage range	-36 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	42.7 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	30.3 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 43 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223